

URBAN TEXTURES GLAZED CERAMIC WALL TILE

This classic color palette creates a sophisticated design element that is both on trend and timeless.



Photo Features White Glossy in 3" x 6"

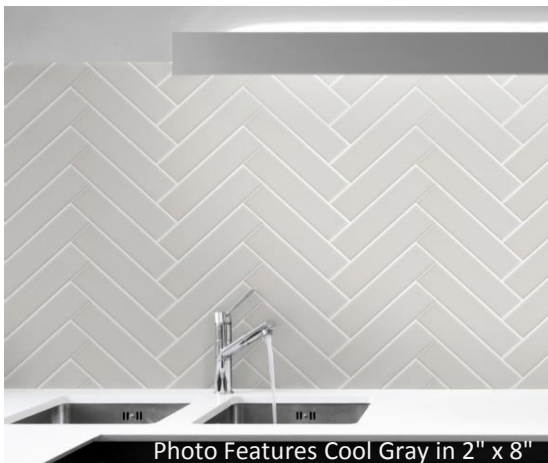


Photo Features Cool Gray in 2" x 8"



Photo Features Ivory Glossy and Gray Glossy in 4" x 12"



Photo Features Cool Gray in 3" x 6"

URBAN TEXTURES GLAZED CERAMIC WALL TILE

UT1001 White Glossy
UT1003 White Matte

UT1007 Beige Glossy

UT1014 Cool Gray Glossy

UT1004 Ivory Matte
UT1002 Ivory Glossy

UT1005 Gray Glossy

UT1011 Graphite Glossy

SIZES

4" x 12" Wall Tile

*2" x 8" Wall Tile

4" x 16" Wall Tile

*3" x 6" Wall Tile

*Available in White Gloss, Ivory Gloss and Cool Gray.

TRIM SIZES AVAILABLE

Type	Number	Size	Type	Number	Size
Bullnose (4" side)	S4D129	4 x 12	*Cove Base	A3461	4 x 6
Bullnose (4" side)	S4D49	4 x 16	*Cove Base	SCL3461	4 x 6
Bullnose (12" side)	S412D9	4 x 12	*Cove Base	SCR3461	4 x 6
Bullnose (16" side)	S44D9	4 x 16	*Quarter Round	A106	1 x 6
*Bullnose (2" side)	S4829	2 x 8	*Quarter Round Beak	AC106	1 x 6
*Bullnose (3" side)	S4639	3 x 6			
*Bullnose (6" side)	S4369	3 x 6			
*Bullnose (8" side)	S4289	2 x 8			

*Only available in White Gloss, Ivory Gloss and Cool Gray Gloss

APPLICATIONS

	Interior			Exterior	
	Residential	Light Commercial	Commercial	Residential	Commercial
Walls /Backsplashes	✓	✓	✓	✓	✓

INSTALLATION

Thickness
5/16"

Grout Joint Recommendation
Approx. 1/8"
When using staggered joint installations
overlap is not to exceed 33%

Shade Variation
Low

*Large format and rectangular wall tile require specific attention during installation. In view of ANSI and manufacturing tolerances, it is understood no more than 33% offset should be used for install.

TEST RESULTS

	ASTM#	Results
Water Absorption	C373	< 20.0%
Breaking Strength	C648	> 120 lbs
Scratch Hardness	MOHS	4.0 - 6.5
Chemical Resistance	C650	Resistant